



HARLEY RAKE

To Suit Mini Machines, Skid Steers and Tractors



HARLEY

The Ultimate Landscaping Tool

GET ATTACHED
with an experienced partner



HARLEY RAKE

USES

- Seedbed Preparation
- Site Cleanup
- Rejuvenating Old Turf
- Reconditioning Hard Soil
- Trench Restoration
- Grading & Shaping
- Levelling
- Windrowing Debris
- Drying Out Muddy Sites
- Site Preparation
- Blending Materials

Ideal for lawn care, wineries, golf courses, paving contractors, concreters, landscapers and builders



GET ATTACHED
with an experienced partner



HARLEY RAKE

FEATURES



Single Hydraulic Motor

Located high away from dirt and debris. The low profile chain case allows maximum digging depth.



Pure Carbide Proprietary Teeth Design

Carbide-tough for long life. Special blunt shapes creates the best seedbed sub-base fracture pattern and superior moisture retention and release




Dual independently adjustable gauge wheels

Allow for skim passes for over-seeding - or - adjust to cut drainage gauges



Oil bathed, enclosed chain drive

With centre chain idler proven to prolong drive chain life by eliminating chain slap and compensating for chain stretch. Double #50 chain on tractor and skid steer models.

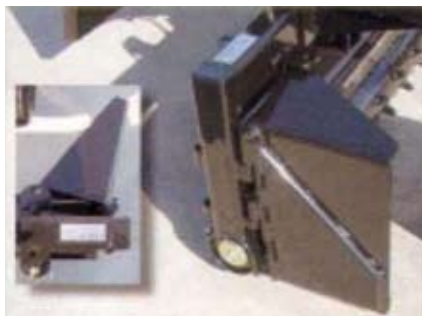

Reversible box ends

Dual position end plates allow for windrowing and directing material while operating the skid steer in forward or reverse. Box ends can be flared out for working along foundations or sidewalks. The box ends are reinforced with hardened steel in wear area's.



Adjustable Rhino-Hide Barrier

Quickly choose the size of material you want to leave on the seedbed. Raising barrier promotes faster soil drying. The barrier is stiff for pushing yet flexible enough to allow damage debris to pass.

GET ATTACHED
with an experienced partner



HARLEY RAKE

TRACTOR MOUNT

Tractor Mount Compensation Slot

For attachment of the three point arm. fixed or floating depending on your job site requirements.



Easy to use Roll-Back Barrier

React quickly to soil conditions by controlling particle size.



SPECIFICATIONS

Specifications	M4	MX7H	T6H	TM7H
Machine	Mini Machines	Skid Steer Loaders	Tractors	Tractors
Weight (Kgs)	204	476	376	617
Length (Overall)	1295	1625	1219	1143
Width (Overall)	1473	2362	2133	2413
Raking Width (Full Angle)	1220	2006	1752	2058
Angle Roll	20°	20°	15°	15°
Min Rec Flow (LPM)	30	57	NA	NA
HP Range	NA	NA	16-22	42-80
Hitch	Standard	Standard	3pt CAT 1/3	3pt CAT 1/3

GET ATTACHED
with an experienced partner